




BLADETM
L I G H T

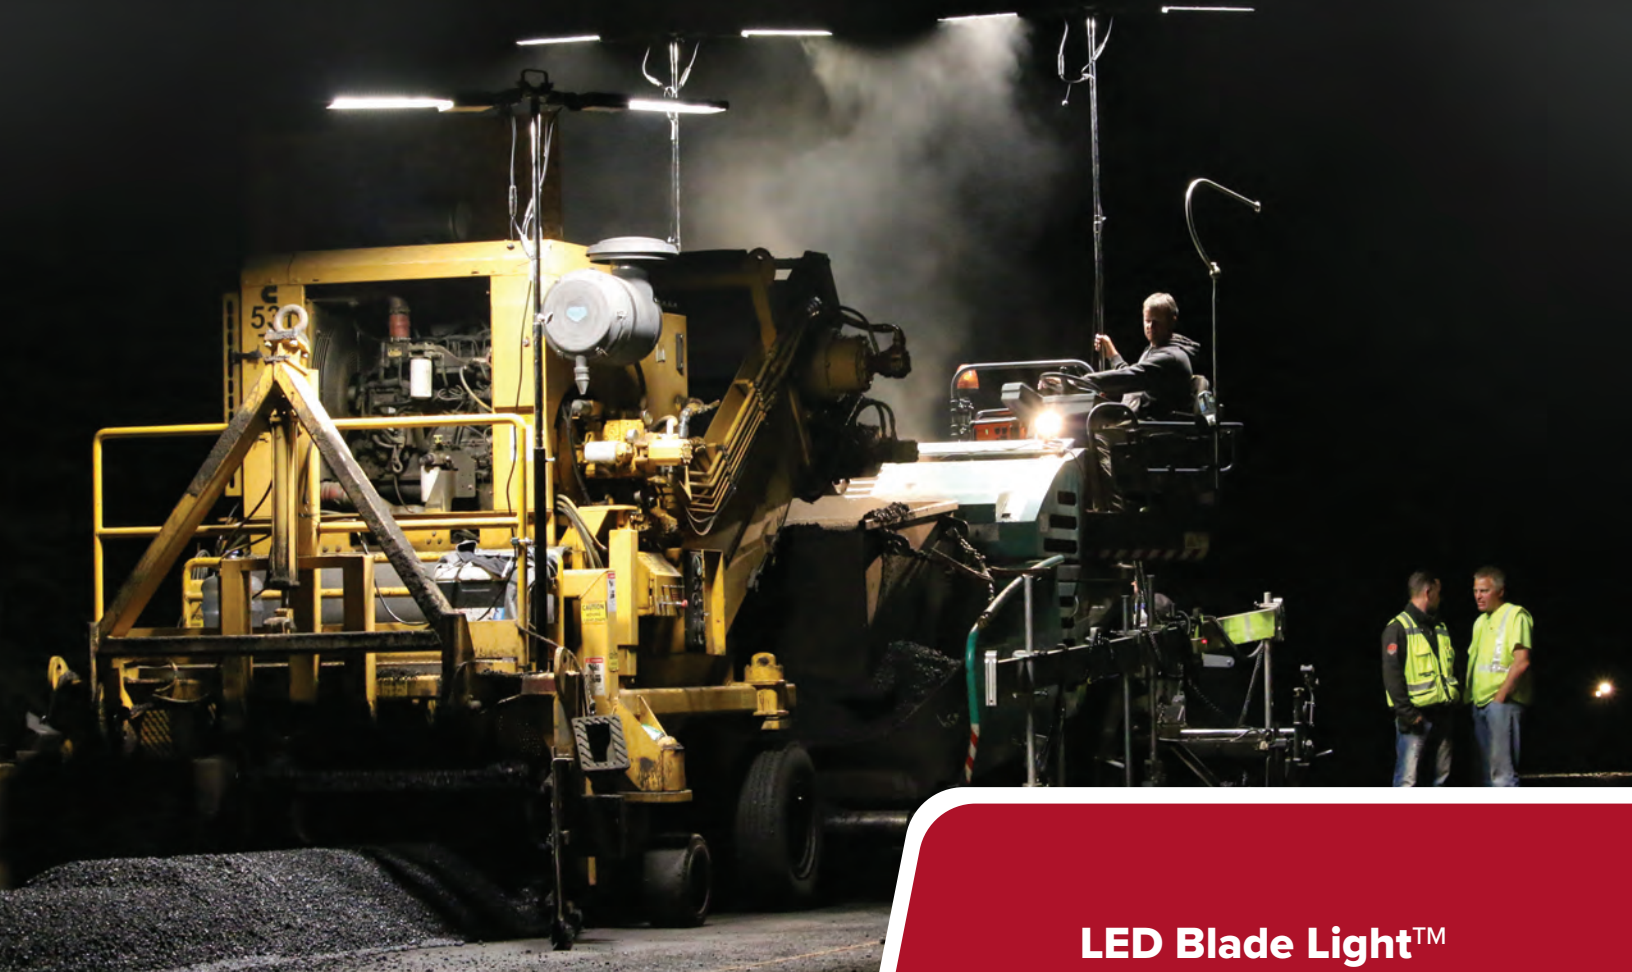

LED Blade LightTM
Specifications And Photometrics

LED BLADE LIGHT™


Safer Nightwork Starts With Safer Lighting

With its easy to adjust ball mounted joints, the LED Blade Light can be simply adjusted to direct light to where it is needed most. Combined with its low profile design and state-of-the-art LED's, the LED Blade Light eliminates dangerous and distracting glare while producing the equivalent light output as a 2000 watt halogen light. And with its dual blades, operators can use the system for both flood and directional lighting, fully illuminating their platform for safer performance.

While halogen and high intensity discharge (HID) lights create and disperse heat, the LED Blade Light always stays cool to touch even after hours of use. This feature helps keep crews comfortable, allowing adjustment of the lights without worry of burns. It also means that crews no longer have to wait around for cool down times, as the LED Blade Light can be taken down and packed up as soon as the job is done.




LED BLADE LIGHT SINGLE HEAD PHOTOMETRICS

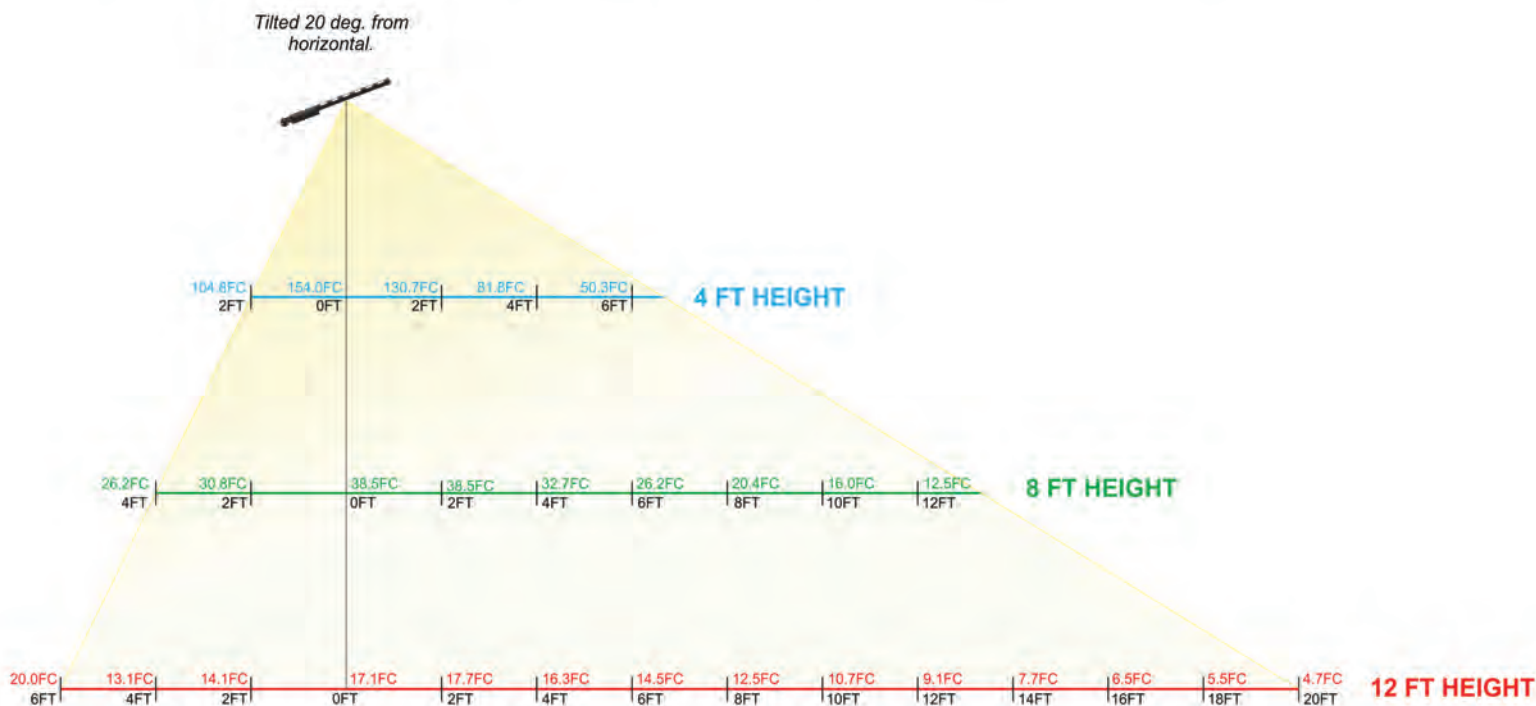


LED BLADE LIGHT DUAL HEAD PHOTOMETRICS

Tilted 20 deg. from horizontal.
Both heads facing the same direction.

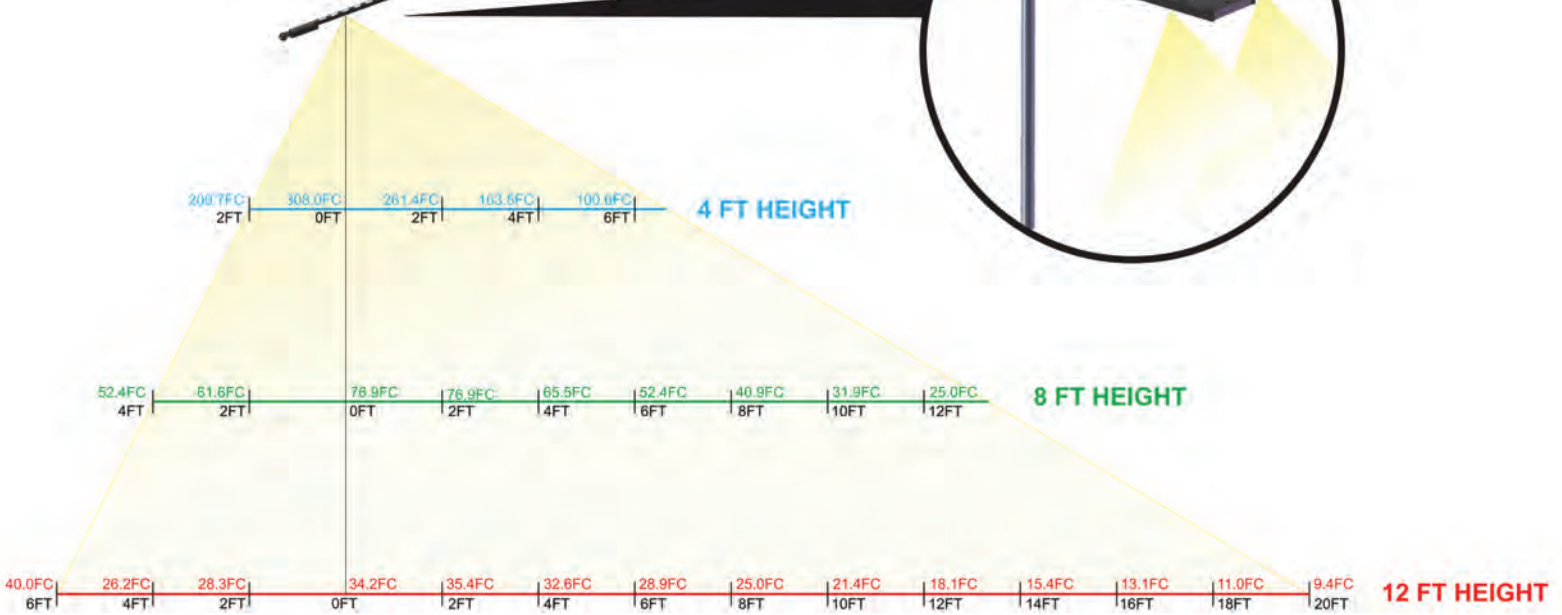

Specifications

- Power:** 110/240v AC 50/60Hz and 12/24v DC
- Configurations:** Single and Dual Head
- Cool-Down Time:** None
- Lifespan:** 50,000 hours
- Heat Output:**

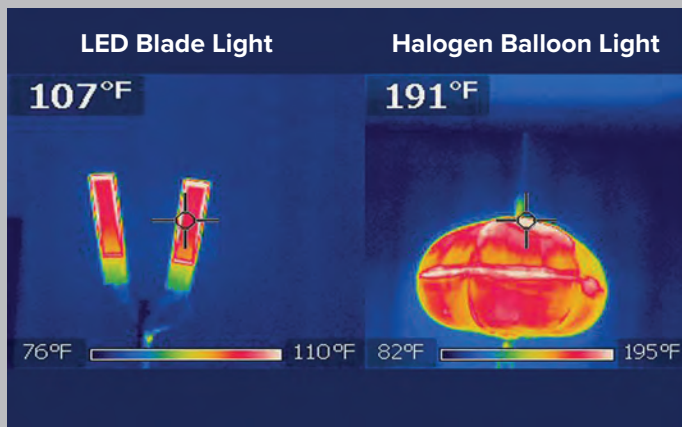



CARLSONPAVINGPRODUCTS.COM

Photographs may include optional extras and non-production features. Specifications, features and design are subject to change without notice. 2016 Carlson Paving Products, Inc.

